



THE POWER OF QUALITY
AND TRADITION!


MOŽNOSTI
KOŠNJE
ZELO VISOKE
TRAVE



MOŽNOSTI
KOŠNJE DO
35 STOPINJ
NAKLONA



PROIZVODE PODJETJA STRUC MUTA ODRAŽA UNIVERZALNOST V UPORABI, VISOKA KVALITETA IN DESIGN, KI NAVDUŠI VSAKOGAR. UNIVERZALNI ENOOSNI TRAKTORJI S PRIKLJUČKI, SO NAMENJENI ZA KOŠNJO, OBDELAVO ZEMLJE, TRANSPORT, ČIŠČENJE SNEGA IN DROBLJENJE ORGANSKIH ODPADKOV.

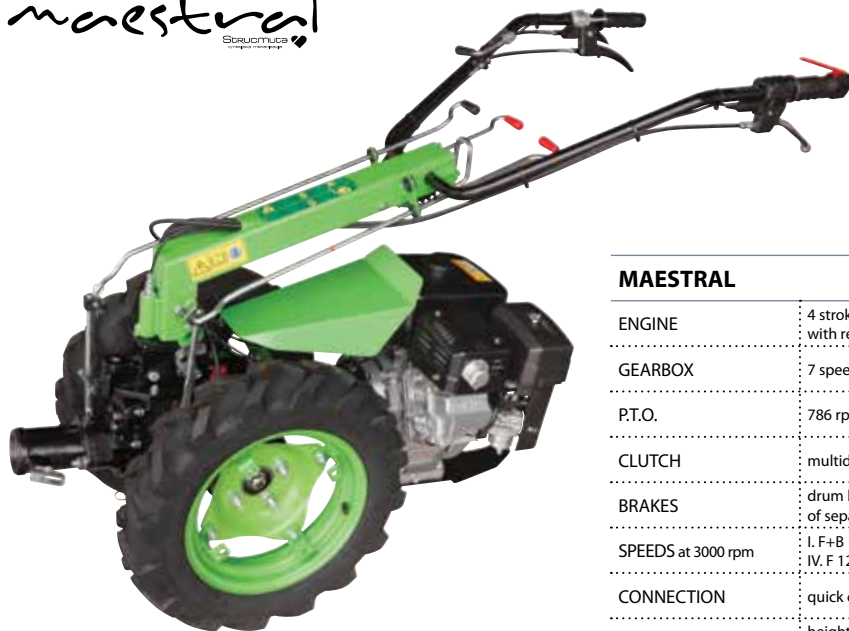

MAESTRAL

ENGINE	4 stroke gasoline or diesel engine 5-7,3 KW, with recoil or electro starter, max 3600 rpm
GEARBOX	7 speeds: 4 forward, 3 backward
P.T.O.	786 rpm independent from gearbox
CLUTCH	multidisc
BRAKES	drum brakes on both wheels with possibility of separate activating
SPEEDS at 3000 rpm	I. F+B 1,4 km/h; II. F+B 2,6 km/h; III. F+B 4,4 km/h IV. F 12 km/h
CONNECTION	quick connection for attachments
HANDLEBAR	height adjustable, rotational for 180°, antivibrating mechanism inbuild
SAFETY DEVICE	safety switch in combination with clutch
DIFFERENTIAL	with blockade
SAFETY BLOCKADE	prevents activating of backward gear and working shaft simultaneously
WHEELS	4.00 x 12
WEIGHT	92 kg (depends on engine type)

25 UNIVERSAL ATTACHMENTS FOR SINGLE AXLE TRACTOR MAESTRAL

Operating the machine is very simple and, most importantly, safe.





PROFI

ENGINE	4 stroke gasoline or diesel engine 5-7,3 KW, with recoil starter, max 3600 rpm
GEARBOX	6 speeds: 3 forward, 3 backward
P.T.O.	786 rpm independent from gearbox
CLUTCH	multidisc
SPEEDS at 3000 rpm	(TILLER) - I. F+B 1,4 km/h; II. F+B 2,6 km/h; III. F+B 4,4 km/h
SPEEDS at 3000 rpm	(MOWER) - I. F+B 1,7 km/h; II. F+B 3,2 km/h; III. F+B 5,2 km/h
CONNECTION	quick connection for attachments
HANDLEBAR	height adjustable, rotational for 180°, antivibrating mechanism inbuild
SAFETY DEVICE	safety switch in combination with clutch
SAFETY BLOCKADE	prevents activating backward gear and working shaft simultaneously
WHEELS	4.00x12 (TILLER); 4.00 x10 (MOWER)
WEIGHT	92 kg (depends on engine type)

24

UNIVERSAL ATTACHMENTS FOR SINGLE AXLE TRACTOR PROFI

Operating the machine is very simple and, most importantly, safe.





KOMBI

ENGINE	4 stroke gasoline or diesel engine up to 5 KW, with recoil starter, max 3600 rpm
GEARBOX	4 speeds: 2 forward, 2 backward
P.T.O.	786 rpm independent from gearbox
CLUTCH	multidisc
SPEEDS at 3000 rpm	I. F+B 1,1 km/h; II. F+B 2,1 km/h; III. F+B 3,6 km/h - option
CONNECTION	quick connection for attachments
HANDLEBAR	height adjustable, rotational for 180°, antivibrating mechanism inbuild
SAFETY DEVICE	safety switch in combination with clutch
SAFETY BLOCKADE	prevents activating backward gear and working shaft simultaneously
WHEELS	4.00 x 8
WEIGHT	82 kg (depends on engine type)

23 UNIVERSAL ATTACHMENTS FOR SINGLE AXLE TRACTOR KOMBI

Operating the machine is very simple and, most importantly, safe.





MINI

ENGINE	HONDA, SUBARU OR LOMBARDINI with 4 - 5,1 kW	
CLUTCH	multidisc	
SPEED AT 3000 RPM	MINI 1/1	MINI 2/2
- I. forward	2,85 km/h	1,7 km/h
- II. forward		3,15 km/h
- I. backward	1 km/h	1 km/h
- II. backward		1,95 km/h
P.T.O.	943 rpm independent from gearbox	
OIL QUANTITY IN THE GEARBOX	1,4 l - SAE 90	
HANDLEBAR	height adjustable, rotational for 180°	
WHEELS	4.00 x 8	
SAFETY DEVICE	safety switch in combination with clutch	
SAFETY BLOCKADE	prevents the activation of backward gear and working shaft simultaneously	
BRAKES , DIFFERENTIAL	no	
WEIGHT	63 kg (depends on engine type)	

9 UNIVERSAL ATTACHMENTS FOR SINGLE AXLE TRACTOR MINI

Operating the machine is very simple and, most importantly, safe.



STRUC MUTA,
kmetijska mehanizacija d.o.o.

Koroška c. 51
SI-2366 Muta

telephone:
+386 (0)2 87 70 110
+386 (0)2 87 70 112

fax:
+386 (0)2 87 70 104

e-mail:
struc.muta@struc.info

www.struc.info

